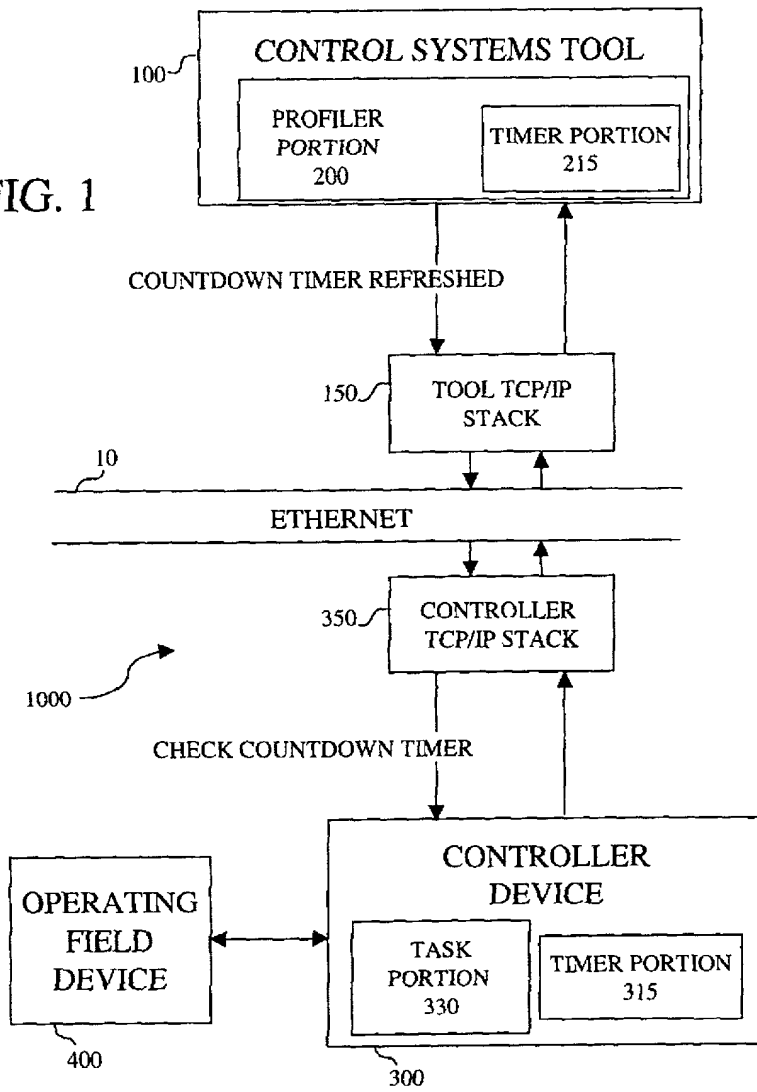
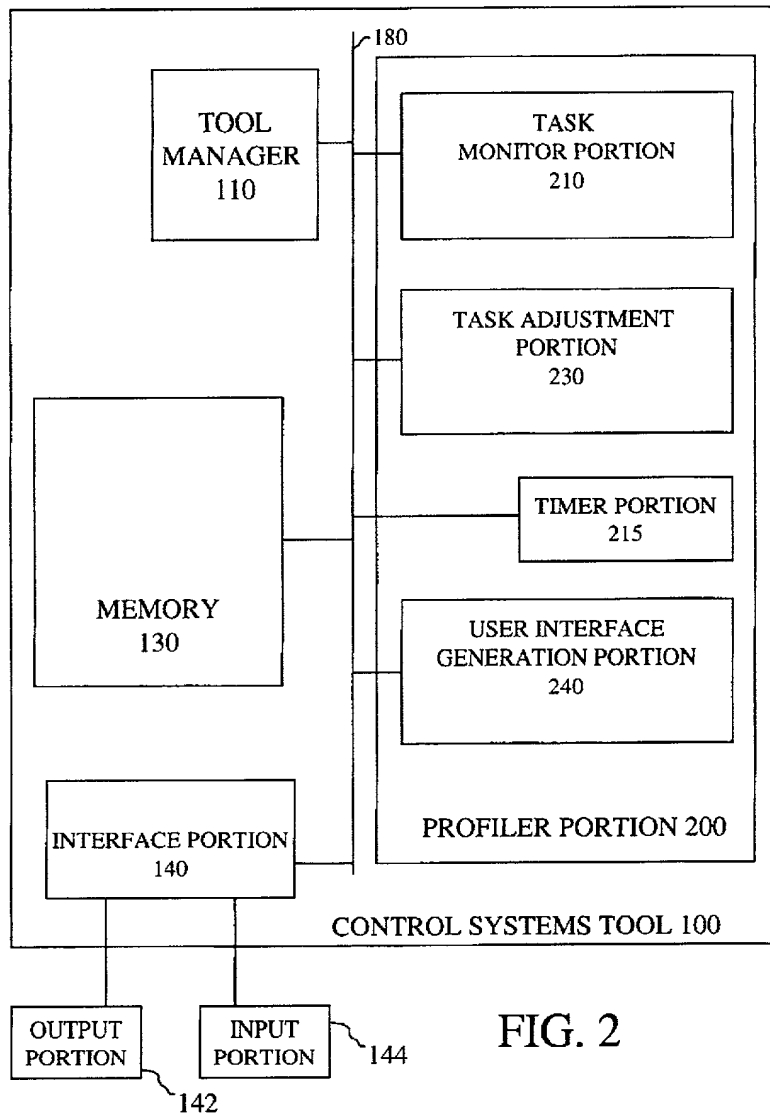


FIG. 1





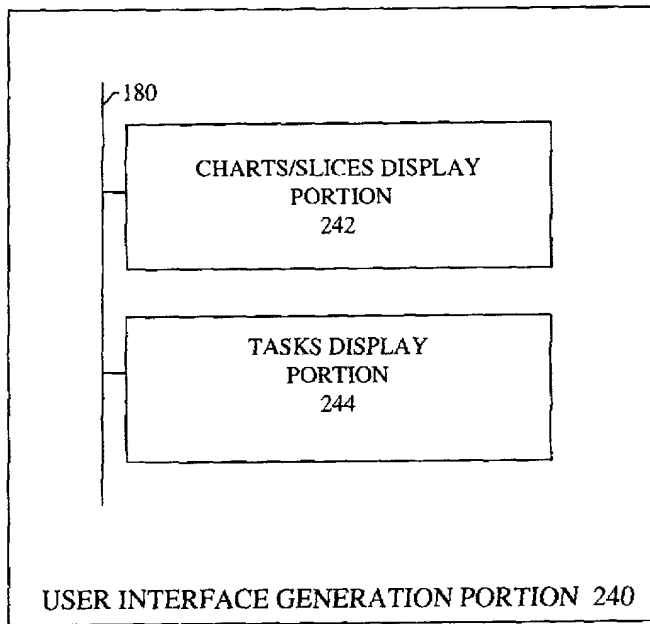
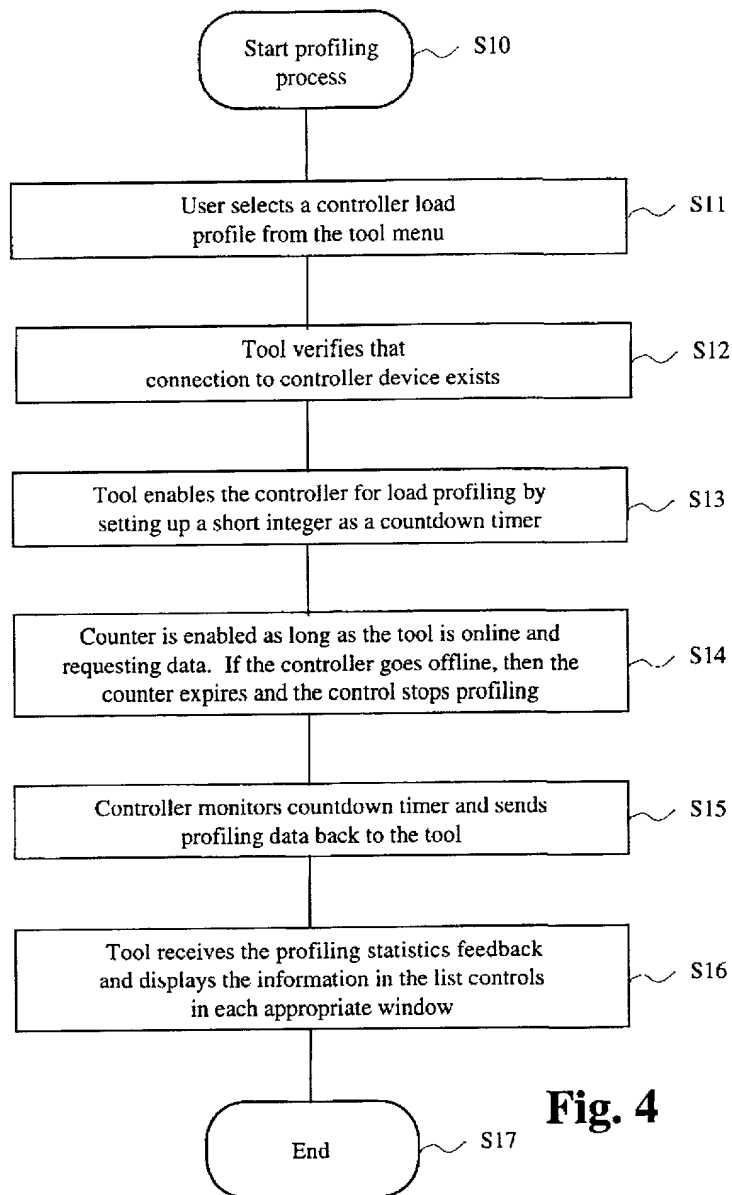
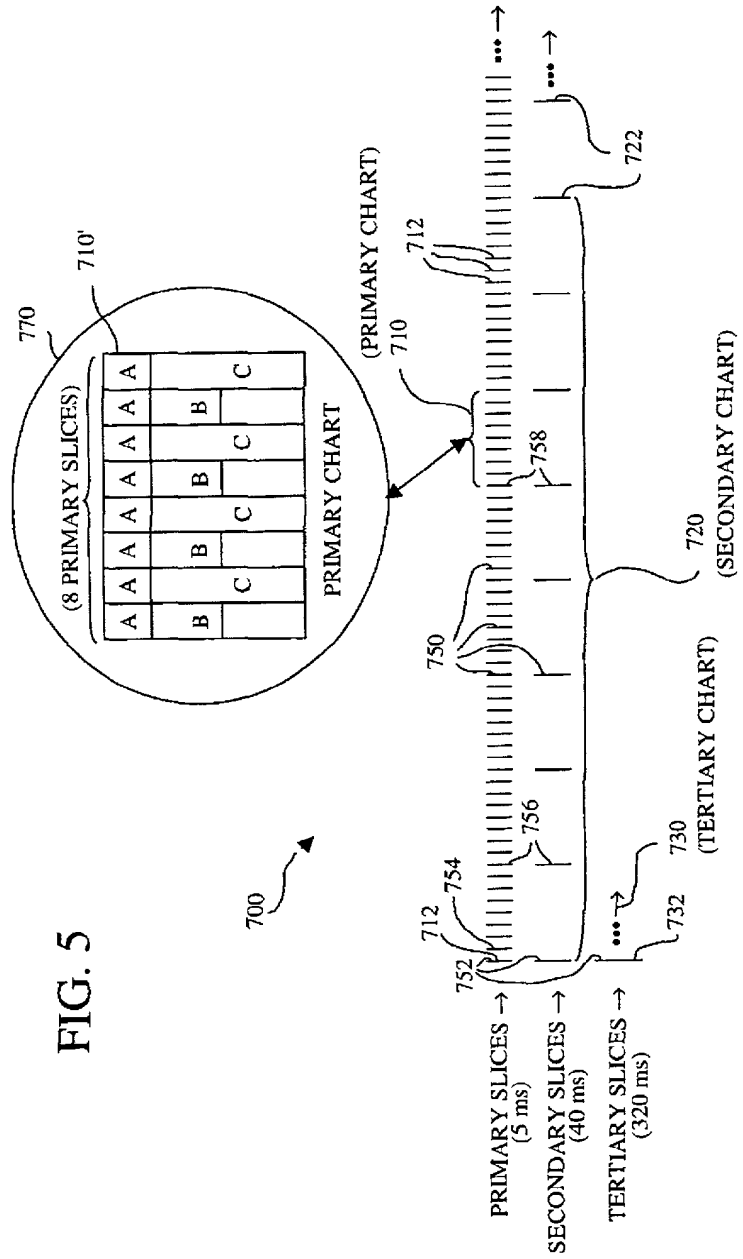


FIG. 3

**Fig. 4**



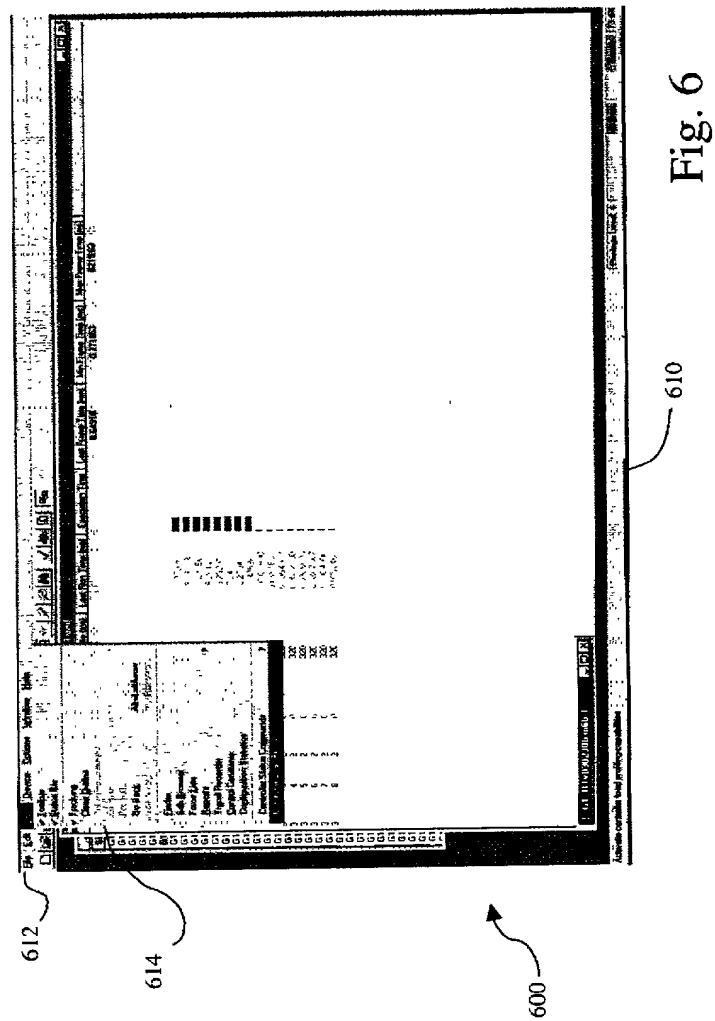


Fig. 7


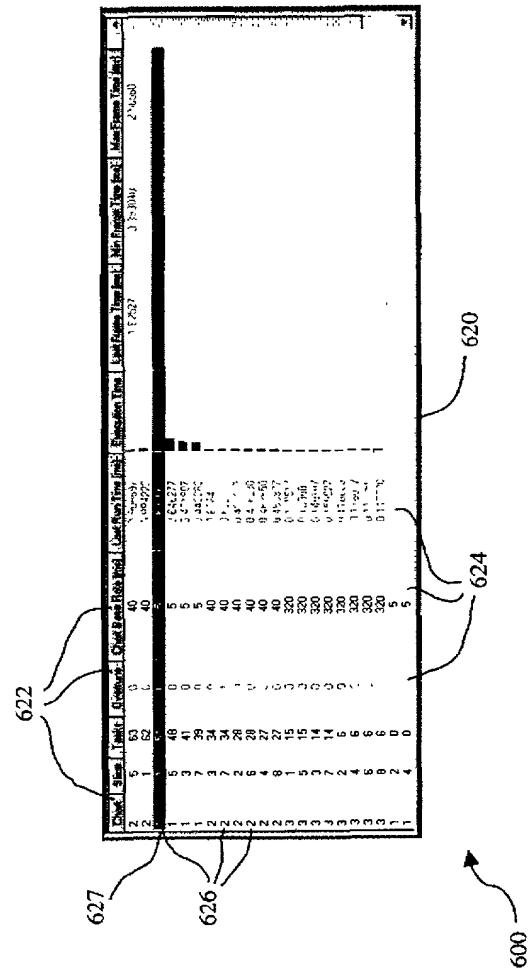


Fig. 8

Fig. 9

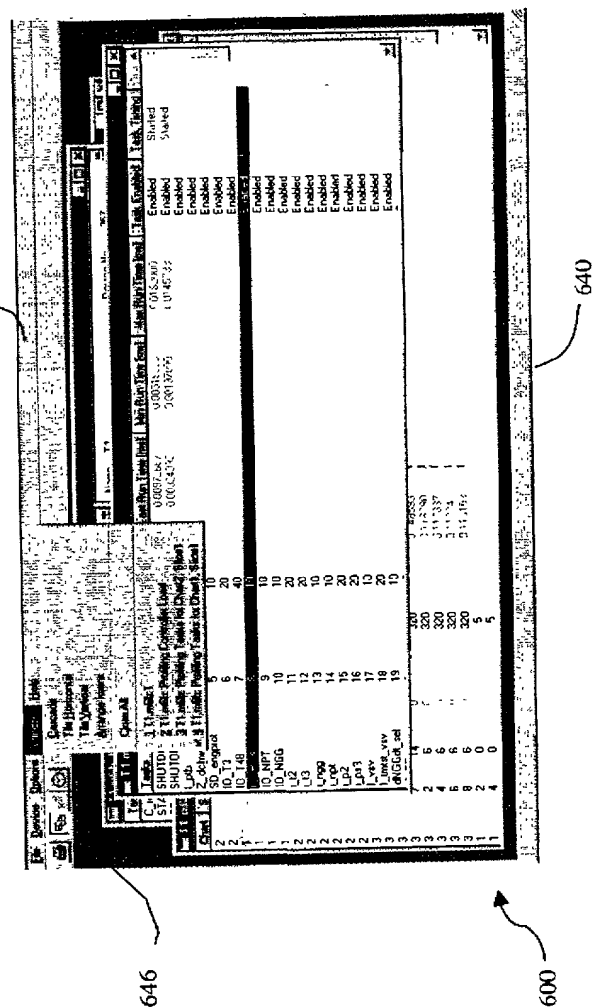

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

General | Memory | NTP | Note | Alarm Scanner | TMR | Host List Scanner | Customer Information | Ethernet Setup

Name: [0000] Device No.: [0] Created: [] Last Modified: []

Code: [External] I/O Mapping Period: [100]

Platform: [DS215UCV803] Controller Load Profile Enable: []

Frame Period: [40 ms (25 Hz)] TMR System: []

Mark VI Standard Template: []

OK Cancel Help

Fig. 10

600 650




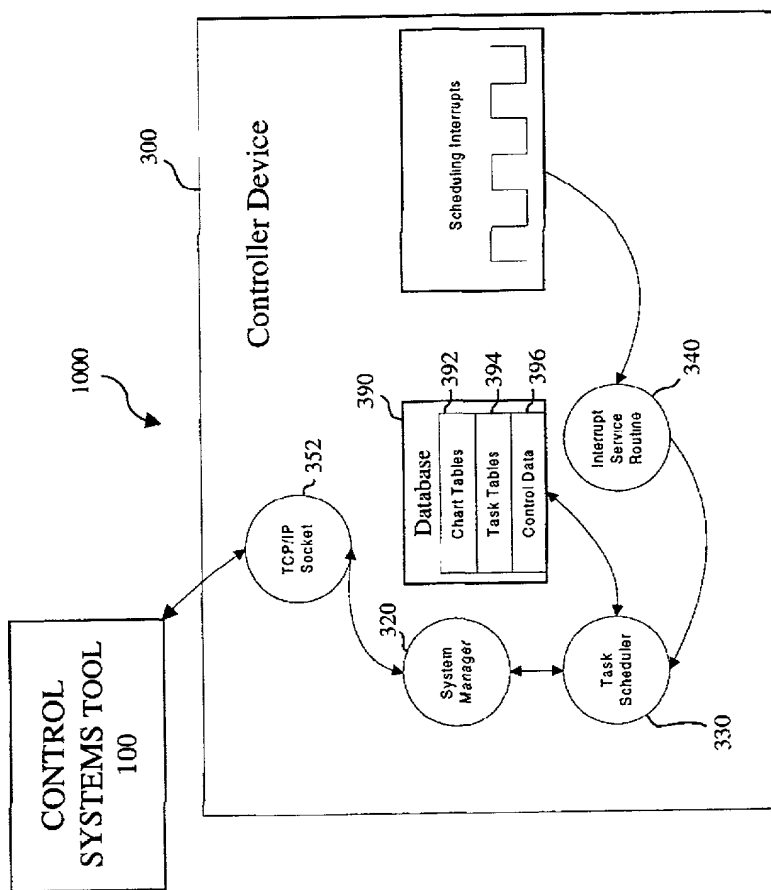



Fig. 11


Fig. 12

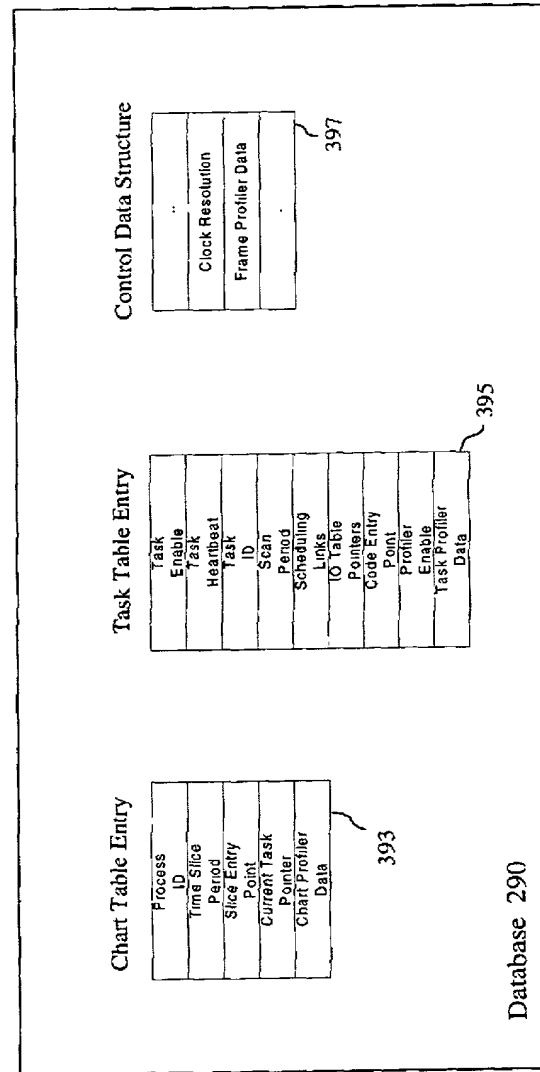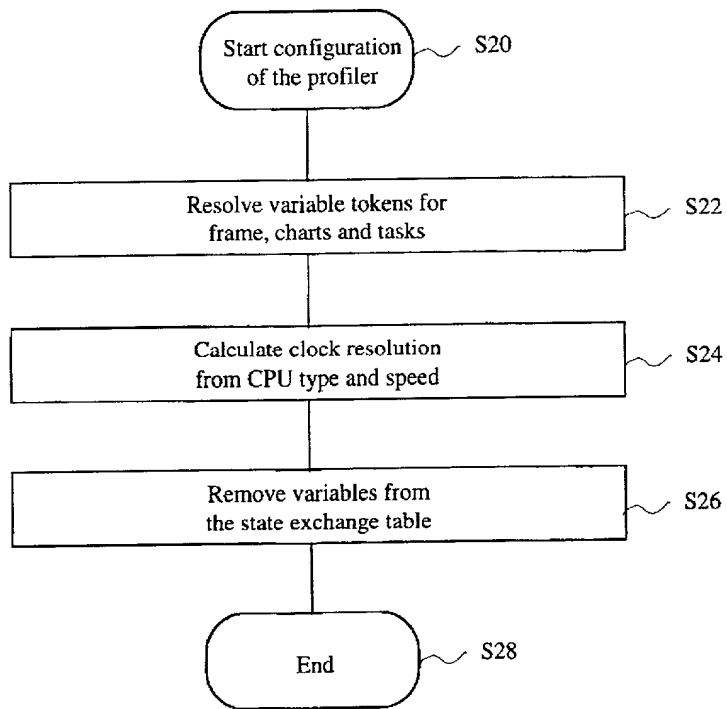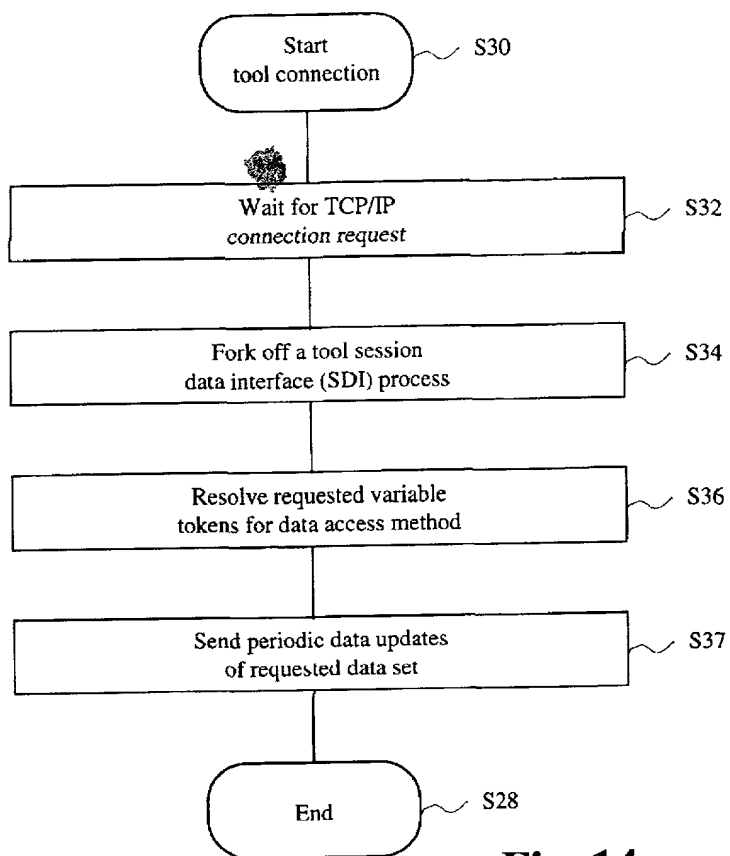



**Fig. 13**


**Fig. 14**

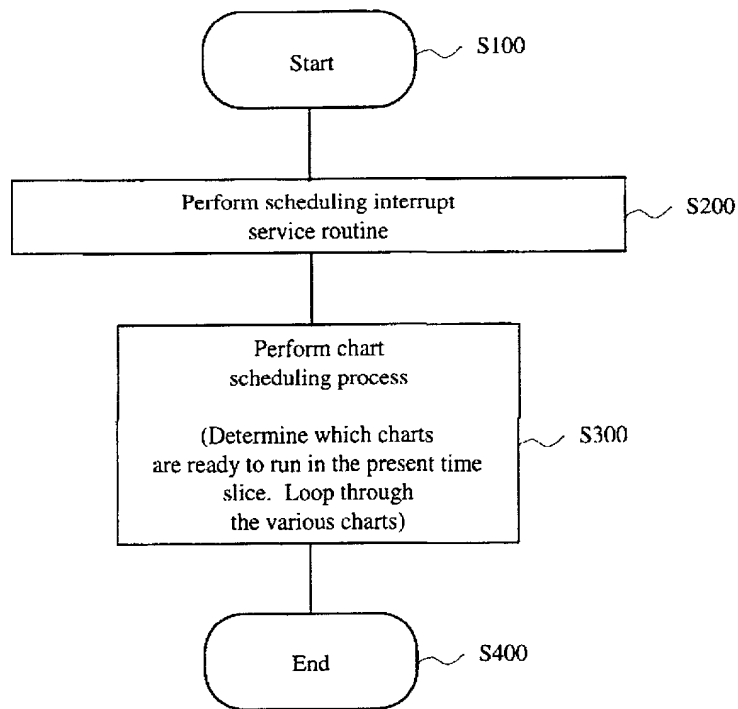
**Fig. 15**

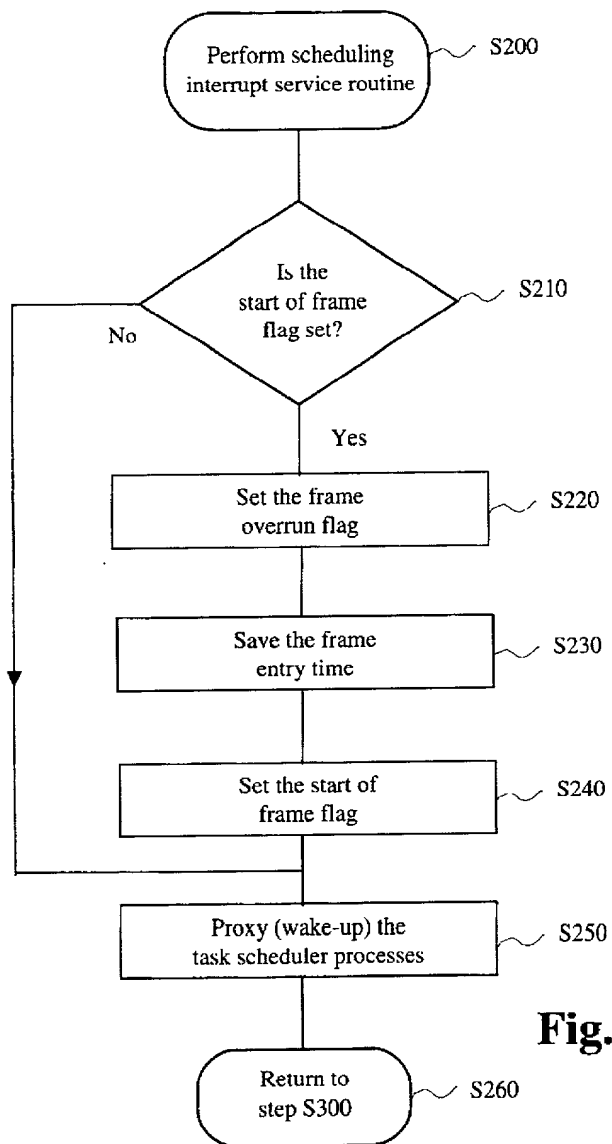
**Fig. 16**

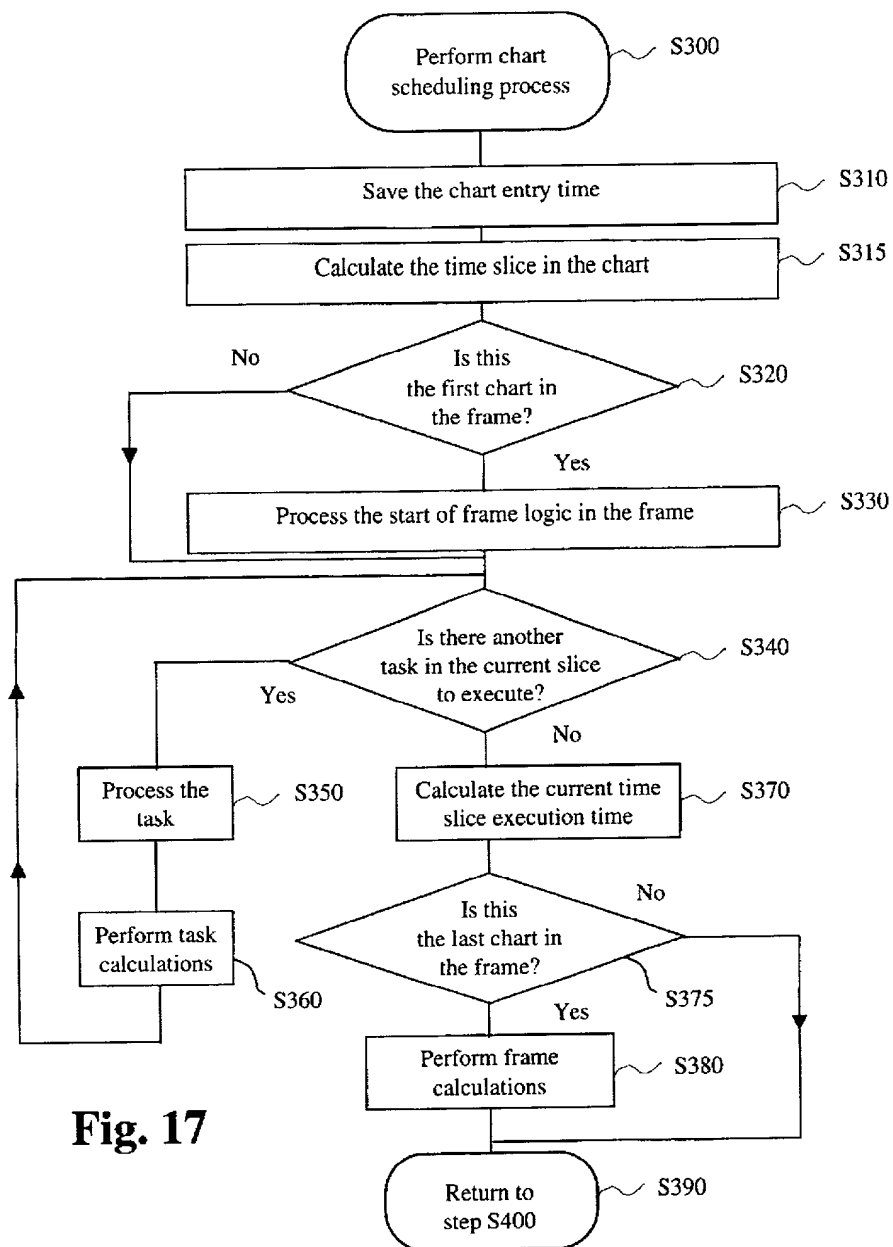**Fig. 17**

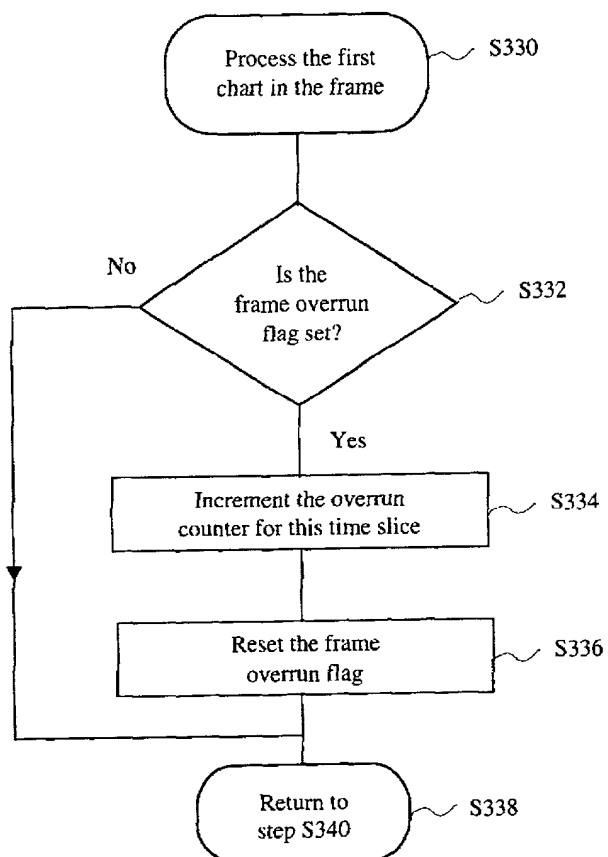**Fig. 18**

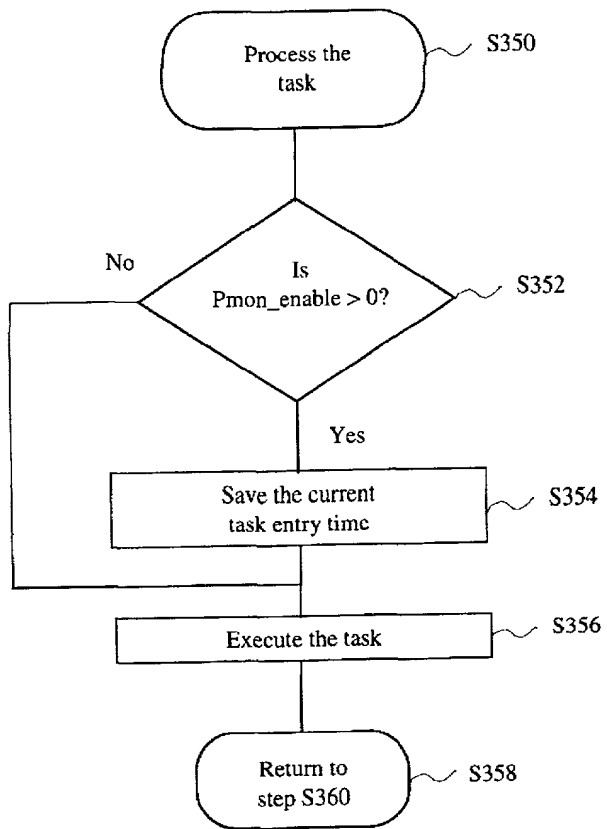**Fig. 19**

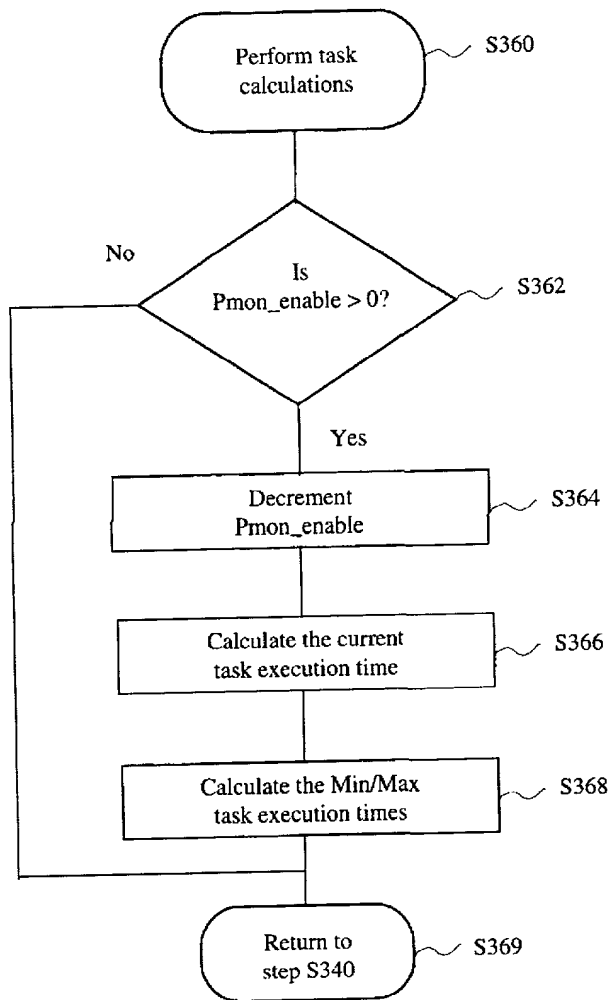**Fig. 20**

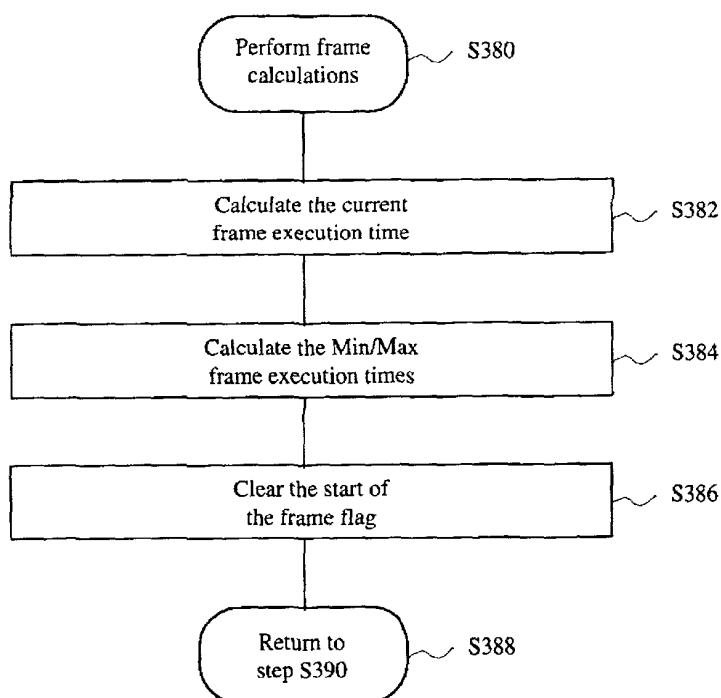**Fig. 21**

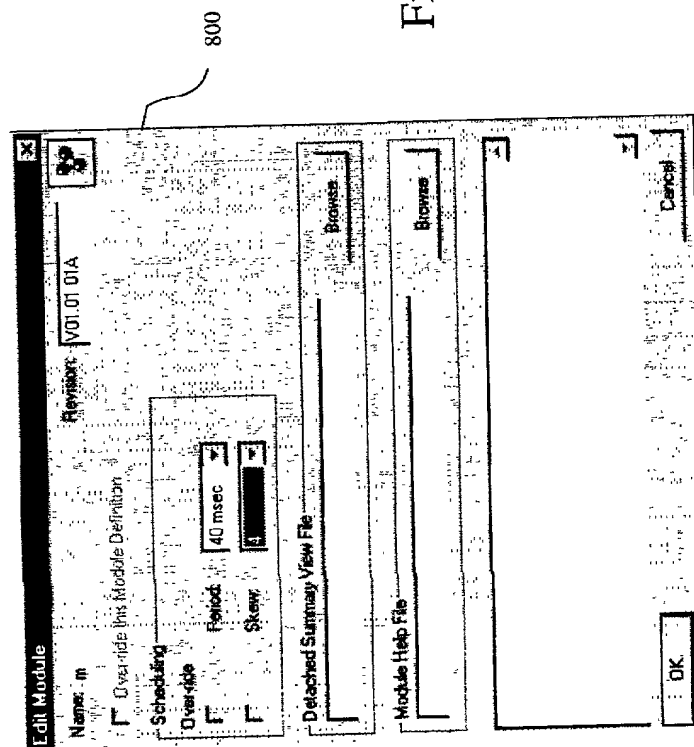


Fig. 22

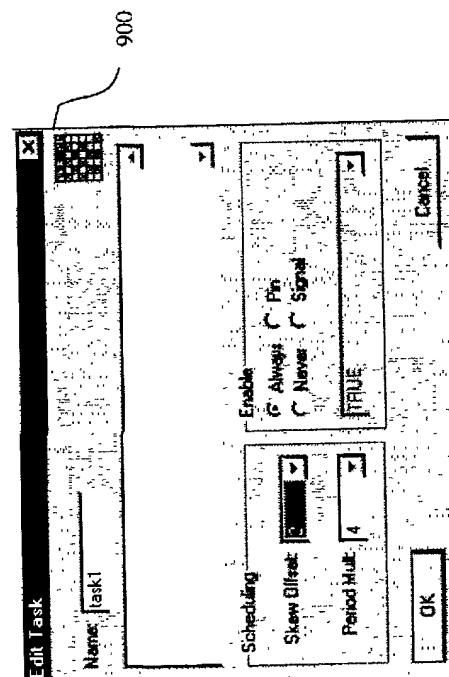


Fig. 23